

316-981P

Transmitted herewith for filing is the patent application of LYNDA M. CRESCENTINI


**Enclosed are:**


- ☒ Six (6) sheets of drawing.
- ☐ an assignment of the invention to \_\_\_\_\_
- \_\_\_\_\_
- ☐ a certified copy of a \_\_\_\_\_ application.
- ☐ associate power of attorney.
- ☒ verified statement to establish small entity status under 37 CFR 1.9 and 1.27. \_\_\_\_\_

OTHER THAN A  
SMALL ENTITY

FOR	NO FILED	NO EXTRA
BASIC FEE		
TOTAL CLAIMS	29 - 20 -	3
INDEP CLAIMS	4 - 3 -	1
MULTIPLE DEPENDENT CLAIM PRESENT		

• If the difference in col 1 is less than zero enter "0" in col 2

RATE	FEE
	\$395
x \$11=	\$ 33
x \$40 x	\$ 41
+ \$130	\$ —
<b>TOTAL</b>	<b>\$469</b>

<u>OR</u>	RATE	FEE
<u>OR</u>		\$ 7.50
<u>OR</u>	* \$ 22 =	\$
<u>OR</u>	* \$ 80 =	\$
<u>OR</u>	* \$ 260 =	\$
<u>OR</u>	TOTAL	\$

- ☐ Please charge my Deposit Account No. \_\_\_\_\_ in the amount of \$ \_\_\_\_\_.  
☐ A duplicate copy of this sheet is enclosed.  
☒ A check in the amount of \$ 469 to cover the filing fee is enclosed.  
☒ The Commissioner is hereby authorized to charge payment of the following fees associated with this communication or credit any overpayment to Deposit Account No. 13-0200. A Duplicate copy of this sheet is enclosed.  
☒ Any additional filing fees required under 37 CFR 1.16.  
☒ Any patent application processing fees under 37 CFR 1.17.  
☐ The Commissioner is hereby authorized to charge payment of the following fees during the pendency of this application or credit any overpayment to Deposit Account No. \_\_\_\_\_. A duplicate copy of this sheet is enclosed.  
☐ Any filing fees under 37 CFR 1.16 for presentation of extra claims.  
☐ Any patent application processing fees under 37 CFR 1.17.  
☐ The issue fee set in 37 CFR 1.18 at or before mailing of the Notice of Allowance, pursuant to 37 CFR 1.311(b).  
27 April 1998  
Charles A. McQuinn

Patent and Trademark Office U.S. DEPARTMENT OF COMMERCE

## DISTINCTIVE PROTECTIVE HEADGEAR

### TECHNICAL FIELD

This invention relates to protective headgear bearing embedded distinguishable marking, such as alphanumeric data, color patterns, and stylized designs, for ready identification to headgear viewers.

### BACKGROUND OF THE INVENTION

Nearly everyone must be aware that various kinds of people wear protective headgear, examples being bicycle and motorcycle riders, construction workers, firemen, mine workers, players of so-called contact sports, race drivers, soldiers, and members of other groups, identifiable by their type of clothing or markings attached thereto.

A disadvantage of much headgear marking is lack of permanence, inasmuch as the wearers' own activities often tend to fade, degrade, or remove the identifying markings, partially if not completely.

Attempts have been made from time to time to ameliorate--if not to eliminate entirely--such degradation of headgear marking, and to encourage improved design, manufacture, and marking of the headgear. Examples identified in U.S. patents include multilayered headgear by Cleveland, 3,437,631; Rodell, 3,445,680; Gesselin, 4,466,138; Tung, 3,885,246; Johnson, 3,946,441; Luna 4,008,949; Mitchell, 4,599,752; and Gentes, 4,993,082. Johnson, Rodell, and Mitchell disclose two-piece separable headgear; Gesselin teaches an inseparable two-piece; Cleveland teaches pigmentation of headgear compositions; Tung, Luna, and Gentes illustrate layering of reflective materials in headgear.

Despite improvements contributed by those inventors or others, headgear tends to carry no marking, or only relatively uninformative all-over marking, or informative marking susceptible to damage/loss.

1 SUMMARY OF THE INVENTION

2 A primary object of the present invention is to provide protec-  
3 tive headgear, distinctive by bearing customized alphanumeric and/or  
4 design marking, made up of informative and/or decorative patterning.

5 Another object of this invention is to embed a distinguishable  
6 marking into the headgear so that even substantial surface damage to  
7 the headgear will be unlikely to impair such marking.

8 A further object of the invention is to distinguish wearers of  
9 headgear, as by company affiliations, sports teams, and/or emergency  
10 crews, for example, clearly enough to avoid mistaking members of one  
11 such group for members of another such group, or even to distinguish  
12 each member from every other member of the same group.

13 Yet another object of this invention is to attain the foregoing  
14 objects without sacrificing, or while actually enhancing, safety or  
15 security aspects provided by such protective headgear.

16 A still further object of the invention is to accomplish the  
17 foregoing objects with little or no increase in cost, or with actual  
18 reduction in headgear costs.

19 In general, the objects of the present invention are attained,  
20 in composite protective headgear, by first providing a thin sheet of  
21 durable plastic composition carrying at one of its faces (perhaps  
22 impregnated with) decorative and preferably informative visible pat-  
23 terning, forming such sheet into headgear shape, and covering a face  
24 of the formed sheet with a preferably thicker layer of solidifiable  
25 plastic composition, solidifying that composition in place, and thus  
26 forming a more durable composite headgear structure, with patterning  
27 visible through an overlying translucent layer to outside observers.

1 More particularly, converting the patterned sheet into headgear  
2 shape is preferably accomplished by thermo-forming, and the covering  
3 of one of its faces with the thick solidifiable layer preferably is  
4 accomplished by injection molding. Alternatively, the components  
5 might be layered together and then be formed into headgear shape in  
6 a single step, as by suitable molding, perhaps not so practicable in  
7 the present state of the art--although it might become preferable.

8 If the patterned sheet is to be at the outside of the headgear  
9 (as is acceptable for all except the roughest environments), the  
10 sheet is desirably translucent and carries the patterning on its con-  
11 cave face, to be covered by the solidifiable plastic composition,  
12 which is opaque (preferably white) to set off the pattern visually.

13 If the headgear is to be subjected to excessive abrasion, the  
14 patterned sheet is preferably located at the inside of the headgear,  
15 is preferably opaque, with patterning on--possibly impregnating--its  
16 own convex surface, and the solidifiable outside layer is desirably  
17 translucent to render the patterning visible to an outside observer.

18 A headgear of this invention is characterizable as a unitary  
19 laminate, having been formed into generally hemispherical headgear  
20 shape, and including distinctive patterning readily visible to those  
21 exterior observers viewing its convex outer surface.

22 Preferably, such distinctive patterning is intentionally dis-  
23 torted initially (when flat), to become substantially undistorted to  
24 a viewer in its resulting generally hemispherical headgear shape.

25 Other objects of this invention, together with means and meth-  
26 ods for attaining the various objects, will become apparent from the  
27 following description and the accompanying diagrams presented by way  
28 of example rather than limitation of embodiments of this invention.

1     **SUMMARY OF THE DRAWINGS**

2             Fig. 1 is a sectional elevation of a sheet of durable plastic  
3 material of this invention, patterned along one face only;

4             Fig. 2 is a series of side sectional elevations of the sheet of  
5 Fig. 1 being formed into substantially hemispherical configuration  
6 in a female mold preparatory to having its patterned face covered;

7             Fig. 3 is a series of side sectional elevations of the sheet of  
8 Fig. 1 being formed into substantially hemispherical configuration  
9 on a male mold preparatory to having its patterned face covered;

10            Figs. 4A and 4B are side sectional views of a uniformly grid-  
11 patterned sheet formed as in Fig. 2 and representing, respectively,  
12 the normally resulting distorted pattern appearance, and a preferred  
13 pre-distorted pattern to compensate for shaping-induced distortion;

14            Figs. 5A and 5B are side sectional views of a uniformly grid-  
15 patterned sheet formed as in Fig. 3 and representing, respectively,  
16 the normally resulting distorted pattern appearance, and a preferred  
17 pre-distorted pattern to compensate for shaping-induced distortion;

18            Fig. 6 is an elevation of the shaped headgear of Fig. 4 or 5,  
19 before trimming away of flashing, showing a resulting undistorted  
20 grid pattern appearing distorted only by being viewed straight on;

21            Fig. 7A is a thickness cross-section view of relatively heavy-  
22 duty headgear, patterned nearer its inner than its outer surface;

23            Fig. 7B is a thickness cross-section view, of relatively light-  
24 duty headgear, patterned nearer its outer than its inner surface;

25            Fig. 8 is a bottom plan of the headgear of this invention with  
26 harness or suspension recesses on its inner surface;

27            Fig. 9 is a side elevation of the headgear of Fig. 8 (pattern  
28 omitted) with outside bosses corresponding to the inside recesses;

Fig. 9A is a fragmentary section through the headgear of Fig. 9 taken at IXA-IXA on Fig. 9;

Figs. 10A and 10B are, respectively, a face elevation and a side elevation of a fastener to fit into a fastener-receiving recess in the headgear of Fig. 8;

Figs. 11A and 11B are partial medial sectional elevations fore-to-aft through the headgear of Fig. 8, with suspension harness and foamed liner, respectively, installed in the headgear interior;

Fig. 12 is a block diagram of the processing of the starting materials into the headgear of this invention.

#### DESCRIPTION OF THE INVENTION

Fig. 1 shows, in sectional elevation (thickness exaggerated), sheet 10 of durable plastic material of this invention having, along one of its opposite faces only, distinctive intermittent pattern 11, optionally impregnating the face to a limited depth.

Fig. 2 shows, in side sectional elevation, thermo-forming female mold 12, bridged (in phantom) by successive positions of flat starting sheet 10', its subsequent first central sagging configuration 20, its further sagging intermediate configuration 20', and (in solid section) substantially semicircular final cut of its resulting configuration 20"--getting progressively thinner at their midpoints.

Fig. 3 shows, in side sectional elevation, male mold 13, bridged similarly by flat starting sheet 10", subsequent first peripheral sagging configuration 30, intermediate further sagging configuration 30', and (in solid section) final substantially semicircular final cut of its resulting upright hatlike hemispherical configuration 20". Each section is somewhat thinner at its junction to the remaining flat peripheral part than its last predecessor was.

1 In both Figs. 2 and 3, most of the remaining flat (unshaped)  
2 portions constitute flashing that eventually is removed by stamping  
3 or a similar operation, leaving the headgear-shaped body portion.

4 Figs. 4A and 4B show side sectional views of a uniformly grid-  
5 patterned sheet formed as in Fig. 2 and representing, respectively,  
6 the normally resulting distorted pattern appearance, and a preferred  
7 pre-distorted pattern to compensate for shaping-induced distortion;  
8 Thus, if the starting sheet has a uniform grid pattern, the forming  
9 of that sheet will distort the pattern as shown in Fig. 4A, wherein  
10 the originally parallel central portions of the grid become spaced  
11 too wide apart, as shown in Fig. 4A, and decrease progressively in  
12 spacing when further from the center. In order to produce a uniform  
13 grid (or other pattern) in a resulting headgear shape, an oppositely  
14 pre-distorted starting pattern should be used, as shown in Fig. 4B.

15 In Figs. 4A, 4B, 5A, 5B, grid crowding and curving attributable  
16 to surface non-perpendicularity to the line of sight are minimized,  
17 to emphasize stretching of the grid attributable to sheet thinning.

18 Figs. 5A and 5B show side sectional views of a uniformly grid-  
19 patterned sheet formed as in Fig. 3 and representing, respectively,  
20 the normally resulting distorted pattern appearance, and a preferred  
21 pre-distorted pattern to compensate for shaping-induced distortion;  
22 Thus, such forming will result in the distorted pattern of Fig. 5A,  
23 wherein the grid lines become spaced further apart along a ringlike  
24 locus of bending at the crown level. Such a localized distortion  
25 becomes progressively less at both greater and lesser distances from  
26 that ringlike crown locus. Hence, to reproduce a uniform grid in a  
27 resulting headgear shape, an oppositely distorted starting pattern,  
28 such as shown in Fig. 5B is preferably employed in this invention.

As explained below, pattern distortion from forming the flat sheet into generally hemispherical headgear shape is pre-calculated to counteract unevenness of forming the sheet including the pattern, so the pattern on the resulting headgear is as regular as desired. Of course, if somewhat ellipsoidal or ovoidal headgear is to result, distortion relative to the conventional planar (x,y) axes of the sheet (not so marked) in Figs. 4A and 4B, and in Figs. 5A and 5B, will be unequal proportionately along the respective axes to appor-tion (or to compensate for) the desired degree(s) of eccentricity.

Fig. 6 shows, in elevation, the headgear of either Fig. 4 or 5, with the resulting pattern substantially undistorted. The apparent distortion is essentially uniform in any elevational view for hemi-spherical headgear, and is usually correctly interpreted visually. A slightly ellipsoidal or ovoidal headgear would be closely similar. The grid-free edge portions are flashing remnants to be trimmed off.

Figs. 7A and 7B are fragmentary thickness sections of resulting headgear in which relative positions of a thin patterned sheet and a thick impact-resistant solidified layer are interchanged between the concave inner surface and the convex outer surface of the headgear.

Fig. 7A shows fragmentarily a thickness section of heavy-duty headgear of this invention, with thick impact-resistant layer 74 at convex outer surface of the headgear, thin layer 72 as its concave inside face and carrying patterning 73 between the two layers and preferably opaque if impregnating by the patterning itself.

Fig. 7B shows a similar section of light-duty headgear having thin translucent layer 78 forming its convex outside face, carrying patterning 77 at (not impregnating) its concave inner surface, which adjoins the convex surface of preferably opaque thick layer 76.



1       The terms "light-duty" and "heavy-duty" in this description are  
2       exemplary rather than limitative, because both composition and thick-  
3       ness contribute to durability, so various trade-offs are possible.

4       The patterning feature of this invention is ignored in all the  
5       rest of the illustrative views, which are directed to conventional  
6       protective headgear features, except that the final block diagram,  
7       which recapitulates steps and apparatus of the present invention.

8       Fig. 8 shows, in bottom plan, headgear 80 of this invention,  
9       featuring bill 81 extending to the right (forward, on a fore-to-aft  
10      axis) and recesses 82, 84, 86, and 88 for fasteners of a suspension  
11      harness on its inner surface, evenly spaced at the bisectors of each  
12      quadrant. The generally hemispherical shape of the headgear is ap-  
13      parent in this view from the even circular spacing of the recesses.  
14      Each recess is adapted to receive and removably retain a conven-  
15      tional fastener (not shown here) when inserted thereinto.

16      Fig. 9 shows, in fragmentary side elevation, the same headgear  
17      having visible external bosses 92, 94, corresponding to internal  
18      recesses 82, 84 of the previous view.

19      Fig. 9A shows fragmentarily a sectional elevation through boss  
20      94 over recess 84 of the same headgear, with the headgear cross-  
21      section shown as single plastic layer 81 more nearly in scale than  
22      in the views where component layers of the composite were visible.

23      Figs. 10A and 10B show conventional fastener 100 in elevation  
24      face-on and edgewise, respectively. The fastener is generally rec-  
25      tangular with rounded corners at one end to facilitate insertion,  
26      with slot 101 adapted to receive and retain an individual strap of a  
27      suspension harness, and with enlargement along its opposite end to  
28      provide a grip to facilitate its removal.

Fig. 11A shows, in partial cutaway fore-to-aft medial sectional elevation, assembly 110 comprising headgear 80 of this invention, with its composite shell 81 shown simplified, and with suspension harness 110 including encircling headband 111, head cap 115, and interconnecting straps 110. Thus, the headgear is spaced away from the head, as is customary for improved ventilation and enhanced safety in the event of headgear impact.

Fig. 11B shows, in a similar view of assembly 120, comprising headgear 80 with simplified showing of its shell 81, and with solid foam liner 89 installed along the inside surface thereof, thicker overhead and progressively thinner down the sidewall. The liner is secured adhesively or by other bonding with the inside wall.

If desired, both the Fig. 11A and the Fig. 11B additions may be combined to provide a solid foam liner and a suspension harness, and any of the assemblies may be provided with a conventional chin strap (not shown here) retained by a clip to the headgear or otherwise.

Fig. 12 is a block diagram of the processing of the starting materials into headgear of this invention. The following description of this view supplements the description of the preceding drawings and will explain further how to make this very distinctive headgear. Reference numerals are omitted from this description as superfluous.

The step SELECT SHEET (top center) is followed by APPLY PATTERN (as by silk screening or surface impregnation of the thin sheet). Next, the patterned sheet passes either to T-FORM MALE or to T-FORM FEMALE as in Figs. 3 and 2, respectively, for corresponding thermoforming. If the resulting pattern is unsatisfactory the article can be sent as a guide to a REVISE PATTERN step. (If intended only as a toy or for visual display, the article can go to TRIM OFF FLASHING.)

1 Normally though, the patterned surface of the intermediate thermo-  
2 formed article is usually covered with solidifiable plastic in the  
3 INJECT MOLD step. When the T-FORM MALE intermediate product is  
4 selected, it receives clear plastic from the INJECT CLEAR step fol-  
5 lowing the SELECT CLEAR step at the upper left. Otherwise, the  
6 T-FORM FEMALE intermediate product receives opaque plastic from the  
7 INJECT OPAQUE step following the SELECT OPAQUE step (upper right).  
8 The product from either mold goes to TRIM OFF FLASHING, completing  
9 formation of the headgear shell. Additional steps are shown for  
10 both a hard hat type of protective headgear, at the left, as INSTALL  
11 HARNESS and optional (broken line) INSTALL CHIN STRAP; and for a  
12 sports helmet the INSTALL FOAM solid pad step followed by the IN-  
13 STALL CHIN STRAP step. Alternatively both the solid foam and the  
14 suspension harness may be installed, with or without chin strap.

15 Optionally T-FORM and/or INJECT MOLD step(s) may be modified or  
16 be replaced by equivalent forming steps, or a single composite step,  
17 such as an all- injection (or equivalent) technique, while retaining  
18 all or some of the advantages and benefits of the present invention.

19 The headgear of this invention (excluding foamed padding, etc.)  
20 may measure as little as several mm. or about one-eighth inch thick,  
21 the patterned sheet being about a tenth of such thickness, or about  
22 a dozen mils; alternatively up to as much as about twice that thick.

23 The compositions and other materials for practicing the present  
24 invention are all readily available through normal trade channels.  
25 Besides some already mentioned, the Cleveland patent discloses other-  
26 potentially useful polymeric compositions for the starting sheet.  
27 Cleveland also discloses inorganic pigments, organic pigments, and  
28 inorganic salts of organic pigments useful for patterns as herein.

1 My preferred headgear compositions include alkylenes, such as  
2 high-density polyethylene (HDPE), polycarbonates, such as GE's  
3 LEXAN® brand thereof, also acrylonitrile-butadiene-styrenes (ABS) or  
4 polyvinyl chlorides (PVC). Whichever is/are chosen should meet or  
5 exceed impact-resistance and also electrical resistance requirements  
6 for protective headgear. Ridges and like structural reinforcement  
7 can be built into the headgear of this invention--but they are not  
8 structurally necessary, as all strength requirements are met anyway.

9 The desired patterned can be accomplished in a number of ways.  
10 My preference, when the sheet is to remain translucent, is to print  
11 the distinctive design on the sheet, which can be done well enough  
12 by conventional silk screening with thermally stable inks.

13 A desirable alternative is sublimation printing, where the inks  
14 impregnate the sheet (usually not translucent) to a depth of several  
15 mils. As thermo-forming heats the sheet anyway, the printing step  
16 can just precede the thermo-forming (or perhaps even be combined).  
17 Suitable sublimation inks are well known, such as disclosed in U.S.  
18 Patents 4,042,545; 5,250,494; 5,270,284; 5,382,561; and 5,391,536.  
19 Also see U.S. Pat. 5,311,816 for more about sublimation printing.

20 Thermo-forming and injection molding are conventional processes  
21 that are so well known as not to need any further commentary here,  
22 notwithstanding that individual processors may have preferred ways  
23 of operating, not necessarily generally known in their trade.

24 Another embodiment of this invention enables distinctive fore-  
25 ground pattern and a partial or an all-over background pattern, such  
26 as marbling or stippling, or reflective micro-beads, or a diamond or  
27 similar geometric pattern, to be superimposed on a single sheet, or  
28 on separate sheets juxtaposed before or during thermo-forming.

1       The durability of the headgear of this invention reduces the  
2 overall cost of maintaining a presentable appearance, not only for  
3 the user's own satisfaction but also for the public impression that  
4 it makes, as is especially important when protective headgear is man-  
5 dated as part of a uniform or other attire in business or industry,  
6 sports or entertainment, civic or military service, etc.

7       The advantages of almost indestructable distinctive patterning  
8 of protective headgear are hard to overstate, especially as compared  
9 with the faded, peeling, scratched, and otherwise degraded indicia  
10 on many a sports team's helmets or a construction crew's hardhats.  
11 Not only can a team or corporate affiliation be readily indicated,  
12 as on the side or front of the headgear, but an individual's name,  
13 number, rank, etc. can be shown on the side or back, for example.

14       Preferred embodiments and variants have been suggested for this  
15 invention. Other modifications may be made, as by adding, combin-  
16 ing, deleting, or subdividing compositions, parts, or steps, while  
17 retaining all or some of the advantages and benefits of the present  
18 invention--which itself is defined in the following claims.

THE CLAIMED INVENTION:

1. Method of providing distinctive protective headgear, comprising the steps of

providing a sheet of durable plastic composition with a visible distinctive pattern at one of its faces,

forming the sheet into generally hemispherical headgear shape, covering the patterned face of the sheet with plastic composition solidifiable into a durable layer, the outward facing composition being translucent, whereupon the pattern is visible to an outside observer.

2. Method according to claim 1, wherein the sheet composition is translucent, and including the step of so forming the sheet in a substantially hemispherical female form, with the patterned face facing away from the form.

3. Method according to claim 2, wherein the solidifiable plastic composition is opaque and including the step of solidifying it into a durable opaque layer against the patterned face.

4. Method according to claim 1, including the step of so forming the sheet on a substantially hemispherical male form, with the patterned face of the sheet facing away from the form.

5. Method according to claim 4, wherein the solidifiable plastic composition is translucent, and including the step of covering the patterned face of the formed sheet with a layer thereof and solidifying it into a durable translucent layer against the patterned face.

6. Method according to claim 1, including a pretreatment step of silk-screening the pattern onto one face of the sheet.

7. Method according to claim 1, including a pretreatment step of impregnating the patterned face of the sheet with the pattern, in at least a substantial part of the patterned face.

8. Method according to claim 1, including a step of covering the patterned face intermediately with a distinctive visible all-over pattern.

9. Headgear produced by the method of claim 1, including a suspension harness spaced from the headgear interior surface.

10. Headgear produced by the method of claim 1, including a solid foam liner adherent to the headgear interior surface.

11. Composite protective headgear, comprising a translucent exterior abrasion-resistant solid plastic layer, an opaque interior solid plastic layer, and an intermediate distinctive patterning visible to an onlooker viewing it from the exterior.

12. Protective headgear according to claim 11, formed from a plurality of plastic compositions one of which carries the distinctive pattern in a distorted configuration adapted to become substantially undistorted when formed into generally hemispherical protective headgear shape.

13. Protective headgear according to claim 12, wherein the distinctive pattern is impregnated into the surface of the sheet.

14. Protective headgear according to claim 12, wherein an all-over pattern accompanies another pattern symbolizing the wearer of the headgear individually or as a member of a group.

15. Protective headgear of generally hemispherical shape and composite laminar structure, comprising  
an outer layer of durable translucent thermoplastic material,  
an inner layer of durable opaque thermoplastic material,  
an intervening patterning layer carried by one of those layers,  
the respective layers being inseparable from one another,  
the distinctive design being visible to an external observer viewing it through the translucent outer layer against the opaque inner layer.

16. Headgear according to claim 15, wherein the laminar distinctive design is impregnated into one of the layers, and comprising a material selected from the class consisting of polyalkylenes, polycarbonates, acrylonitrile-butadiene-styrenes, and acrylic polyvinyl chlorides.

17. Headgear according to claim 15, including spacing means therein adapted to space its concave inner surface away from the head of a person wearing the headgear.

18. Headgear according to claim 15, wherein the spacing means includes suspension material detachably attached to the headgear.

19. Headgear according to claim 15, wherein the spacing means includes padding material non-detachably attached to the headgear.



20. Distinctive protective headgear comprising a sheet of durable plastic material carrying a distinctive pattern in intentionally distorted form adapted to become undistorted by being formed into substantially hemispherical headgear shape.

21. Headgear according to claim 20, having had the sheet formed into substantially headgear shape, with the resulting pattern thereby converted from distorted to undistorted.

22. Headgear according to claim 21, having also a layer of durable plastic material covering the patterned sheet, with the the resulting undistorted pattern therebetween and thus protected by both the sheet and the covering layer.

23. Headgear according to claim 22, wherein the covering layer of durable plastic material was added by injection molding.

**DECLARATION**

I, **LYNDA N. CRESCENTINI**, declare that I am a citizen of the United States of America, residing at Wesley Chapel, FL; AND

That I have read the foregoing specification and claims, and any amendments identified herein, and I understand the same, and I verily believe I am the original, first, and sole inventor of the invention in **DISTINCTIVE PROTECTIVE HEADGEAR** described and claimed therein; AND

That I acknowledge a duty to disclose information I am aware of which is material to the examination of this application, in accordance with Rule 56(a) of the Rules in Patent Cases [37 CFR 1.56(a)]; AND

That I do not know and do not believe that this invention was ever known or used in the United States before my invention thereof, or patented or described in any printed publication in any country before my invention thereof, or more than one year prior to this application; or in public use or on sale in the United States more than one year prior to this application; AND

That this invention has not been patented or made the subject of an inventor's certificate in any country foreign to the United States on an application filed by me or my legal representatives or assigns more than twelve months before this application; AND

That no application for patent or inventor's certificate on this invention has been filed by me or my representatives or assigns in any country foreign to the United States; AND

**SMALL ENTITY DECLARATION**

I have not assigned, granted, conveyed, or licensed, and I am under no obligation to assign, grant, convey, or license, any rights in the invention to any person who could not likewise be classified as an independent inventor if that person had made the invention, or to any concern which would not qualify as a small business concern or a non-profit organization under Rule 9 of the Rules in Patent Cases [37 CFR 1.9]; AND

DECLARATION (Cont'd)

I further declare that all statements made herein of my own knowledge are true and that all statements made on information and belief are believed to be true; and that these statements were made with the knowledge that willful false statements and the like so made are punishable by fine or imprisonment, or both, under section 1001 of Title 18 of the United States Code and that such willful false statements may jeopardize the validity of the application or any patent issuing thereon.

POWER OF ATTORNEY

And I hereby appoint **Charles A. McClure** (Reg. No. 17,177)

**P. O. Box 1168**


**Tampa, FL 33601 (Tel. 813-251-1443)**

my attorney, with full power of substitution and revocation, to prosecute this application and to transact all business in the Patent and Trademark Office connected therewith.

PETITION

WHEREFORE I pray that Letters Patent be granted to me for the invention or discovery described and claimed in the foregoing specification and claims, and I hereby subscribe my name to the foregoing specification and claims, declaration, power of attorney, and this petition.

Date: April 27, 1998

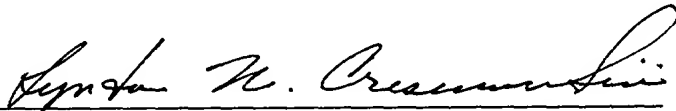

Signature of Inventor

Name of Inventor:

**LYNDA**

**N.**

**CRESCENTINI**

First Name

Middle Initial

Last Name

Mailing Address:

27316 Black Hawk Drive, Wesley Chapel, FL 34249

Protective composite headgear bearing distinctive embedded marking, such as alphanumeric data, color patterns, or stylized designs. A patterned sheet is formed into headgear shape, and the patterned side is covered with solidifiable plastic composition. The outer layer of the resulting composite headgear is translucent, and the inner layer preferably opaque, so that the pattern between layers is protected from abrasion damage while readily visible to an onlooker. Distortion of the pattern by the shaping of the original flat sheet is counteracted by pre-distorting the sheet oppositely to offset it.

Protective composite headgear bearing distinctive embedded marking, such as alphanumeric data, color patterns, or stylized designs. A patterned sheet is formed into headgear shape, and the patterned side is covered with solidifiable plastic composition. The outer layer of the resulting composite headgear is translucent, and the inner layer preferably opaque, so that the pattern between layers is protected from abrasion damage while readily visible to an onlooker. Distortion of the pattern by the shaping of the original flat sheet is counteracted by pre-distorting the sheet oppositely to offset it.

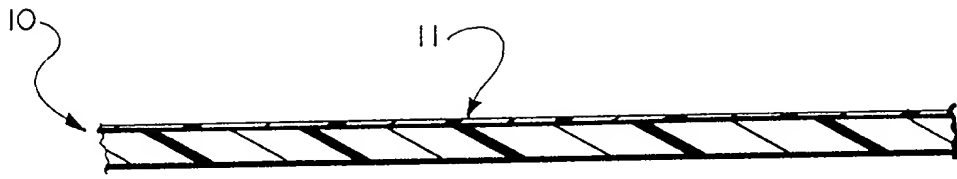


FIG. 1

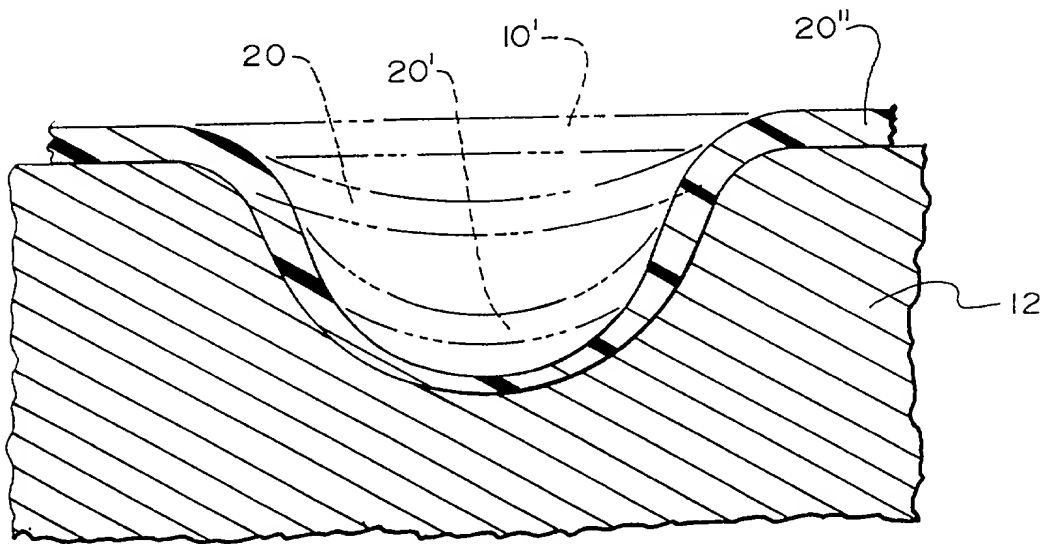


FIG. 2

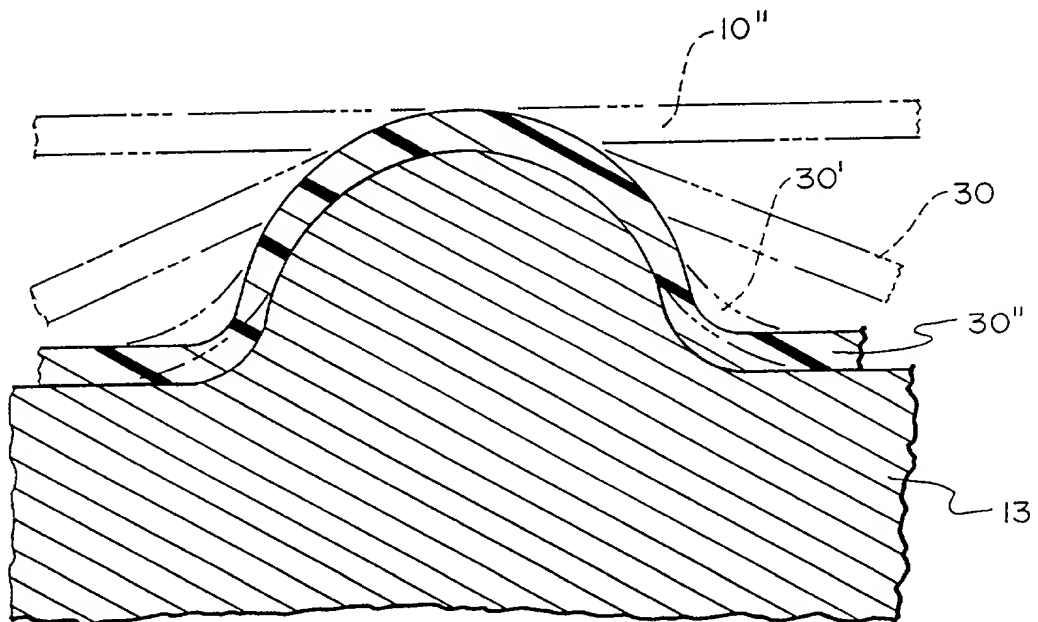


FIG. 3

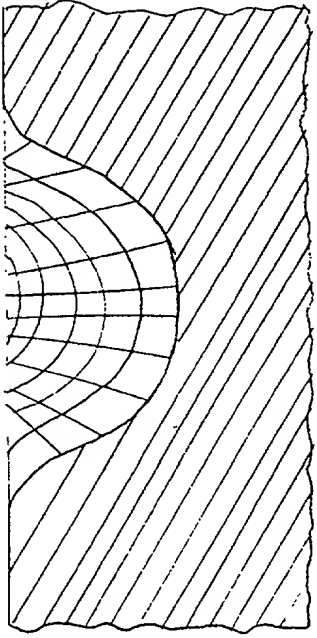


FIG. 4A

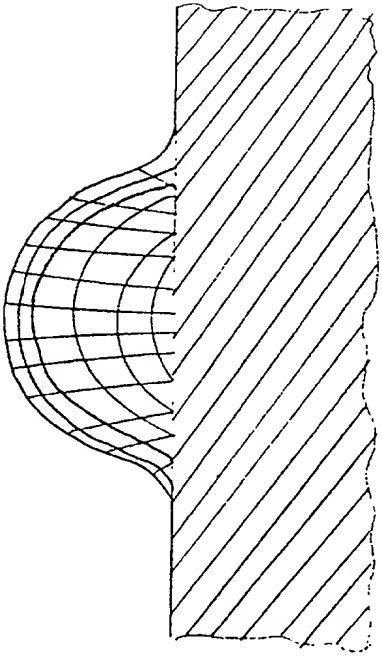


FIG. 5A

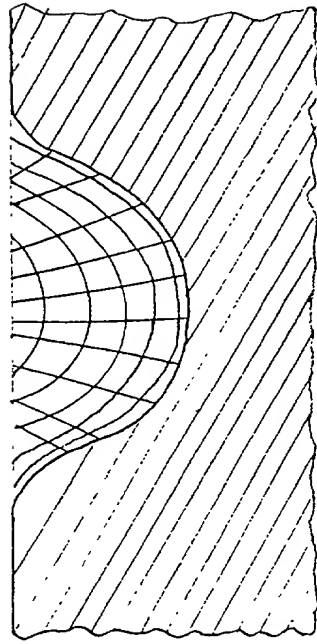


FIG. 4B

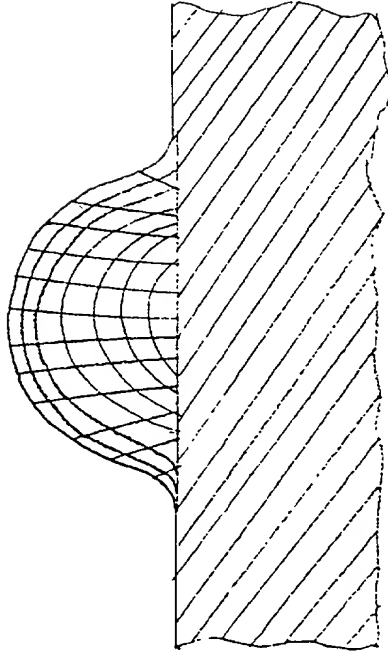


FIG. 5B

FIG. 6

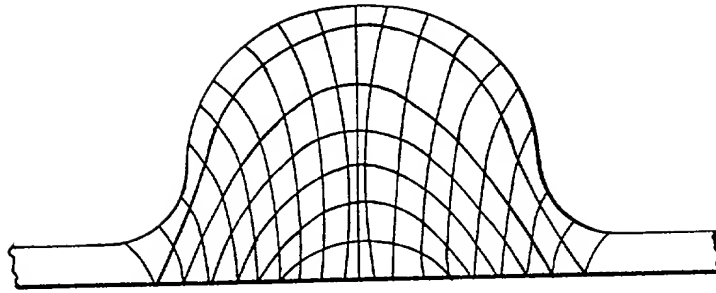


FIG. 7A

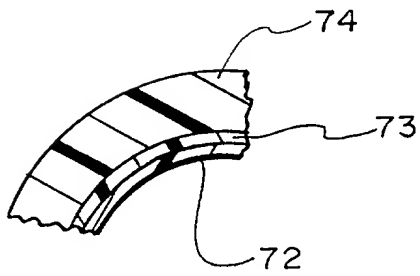


FIG. 7B

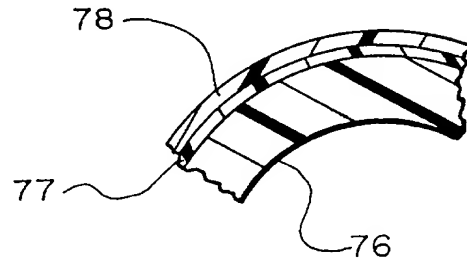


FIG. 8

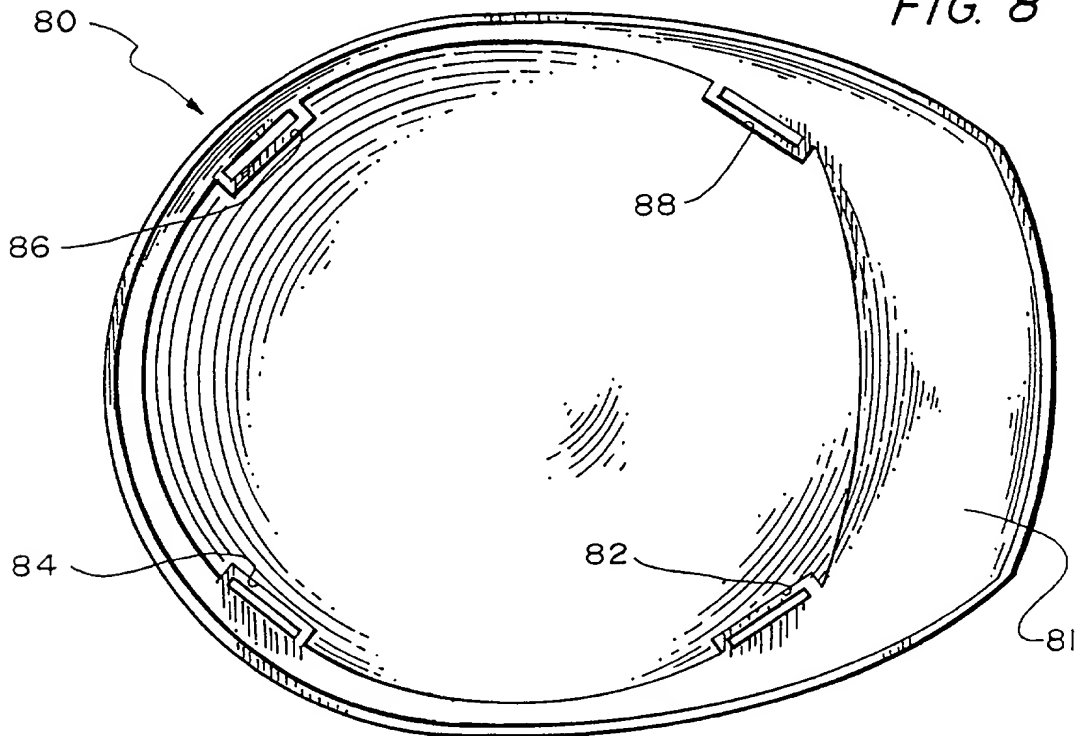


FIG. 9

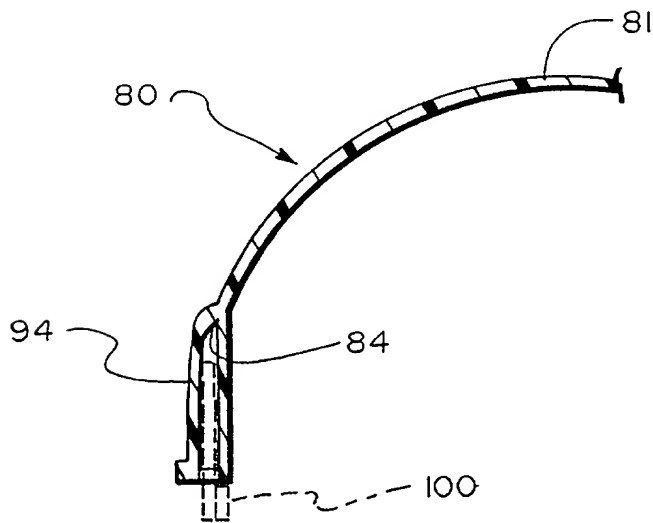
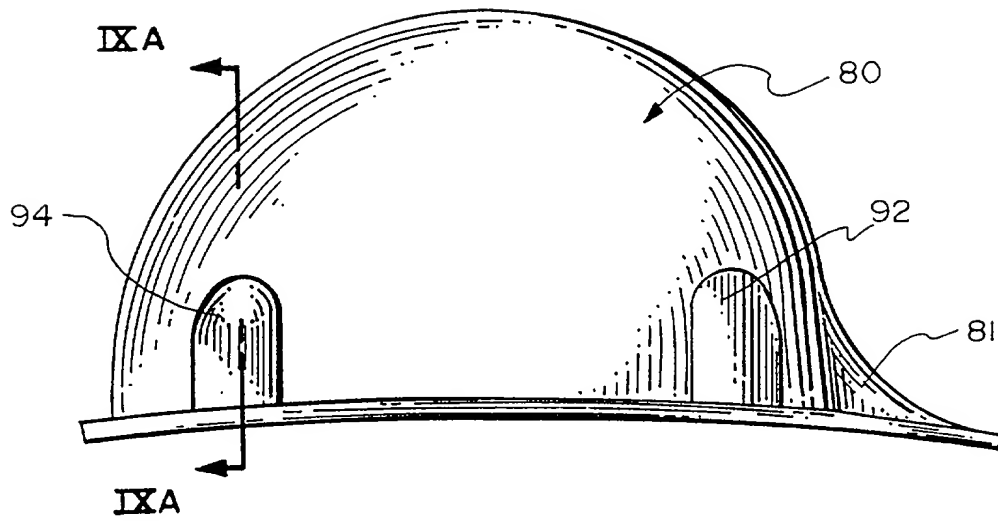


FIG. 9A

FIG. 10A

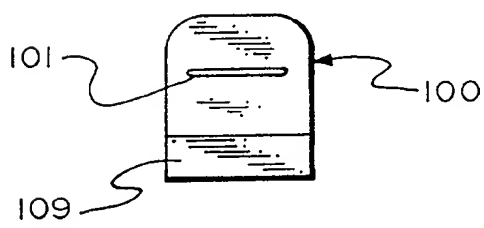



FIG. 10B





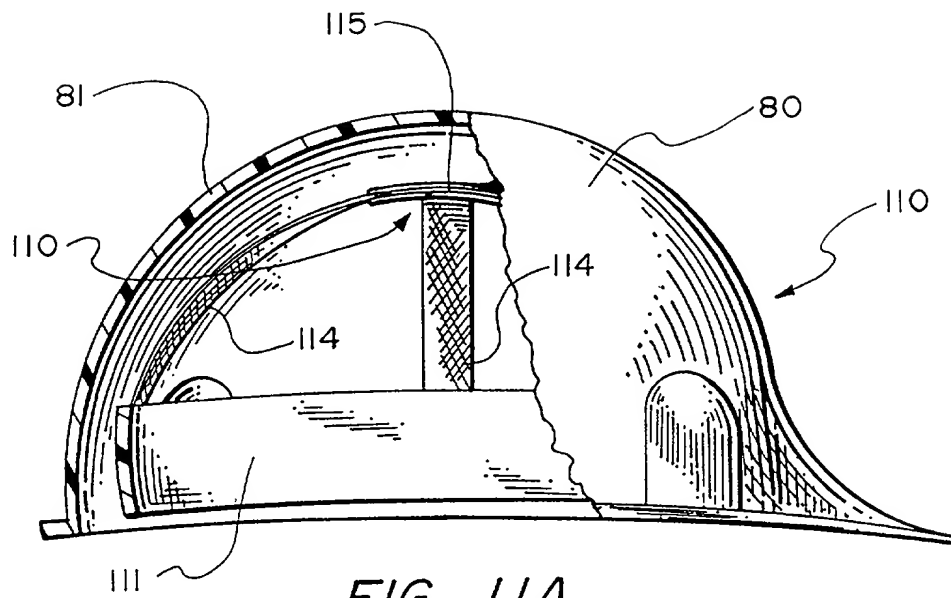


FIG. 11A

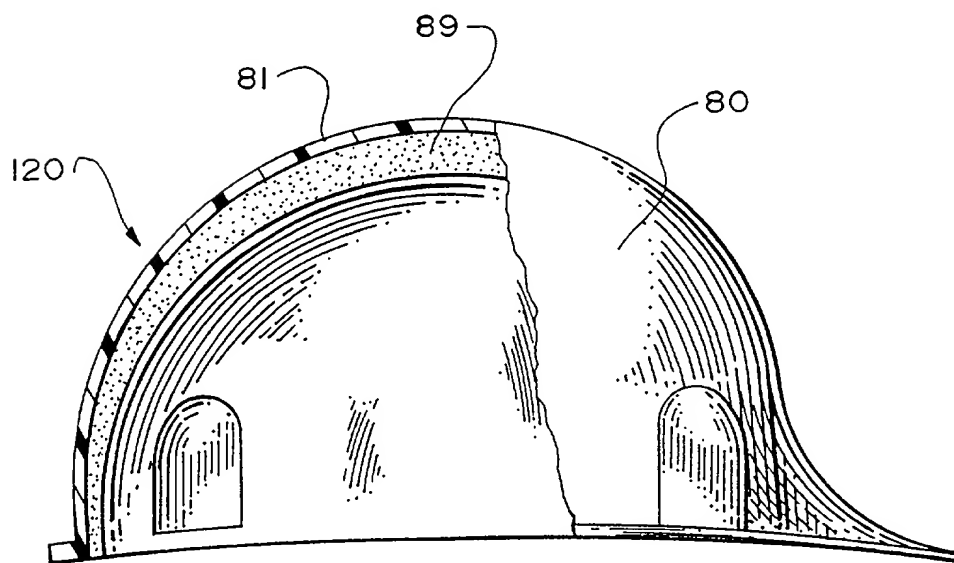


FIG. 11B

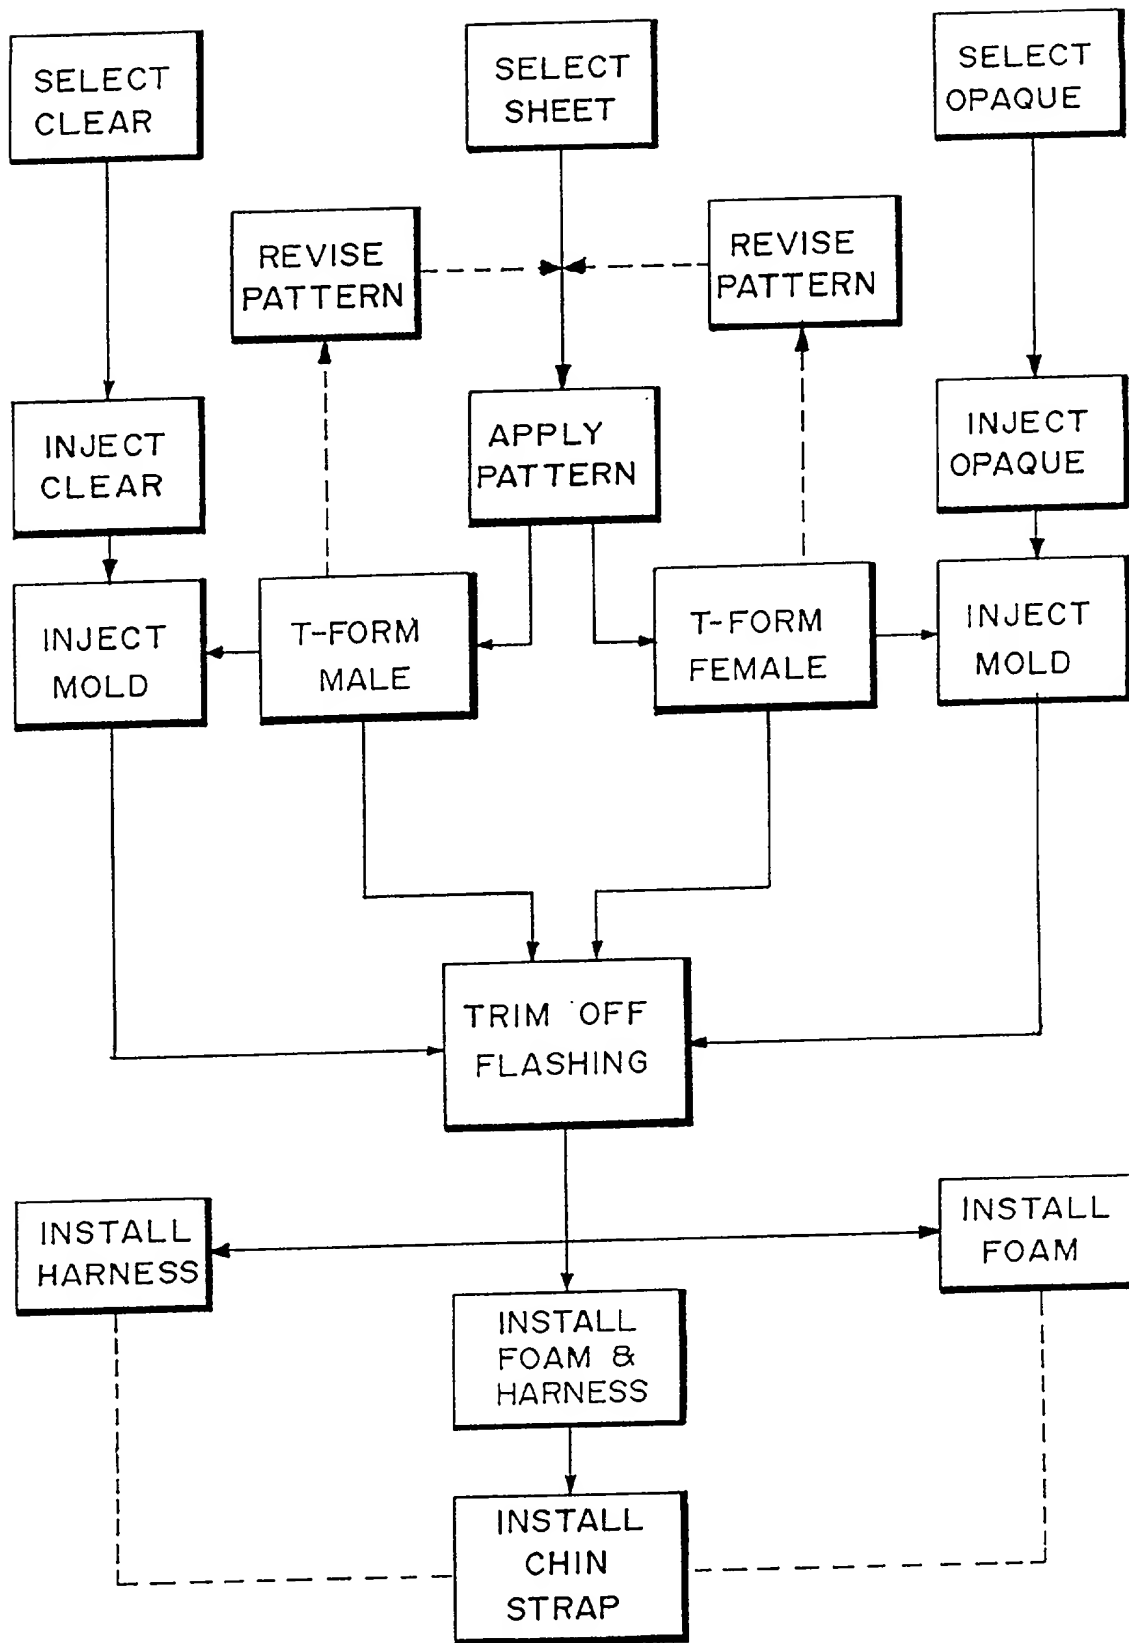


FIG. 12